


Woodura Planks 3.0

LARVIK 3.0 XXL



Larvik Select FSC

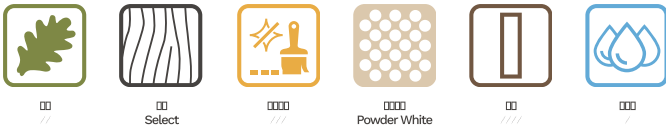

Technical Data

Microbevel	4 sided
XXL	
271 mm	
2378 mm	
11 mm	
0,6 mm	
3	
1,93	
m ² per pallet	93
Weight per m ²	11 kg
	22 kg

Performance Data

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0.07 m ² K/W
Formaldehyde emission (EN 717-1)	E1<=0.124 mg/m3
(EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 1000 cycles
FSC	FSC Mix (DNV-COC-001624)
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class Moderate residential (Class 22)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR bjelin.com