


Woodura Planks 3.0

VISTORP 3.0 L



Vistorp Select (PRO) FSC

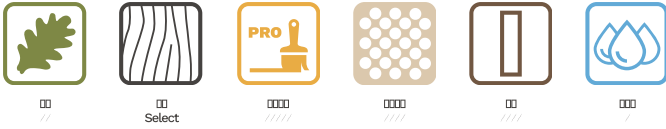

Technical Data

Species	Oak
Grade	Select
Finish	Välinge 5G™Dry™
Core	HDF
Length	L
Width	180 mm
Thickness	2000 mm
Profile	9 mm
Weight per m²	0,6 mm
Moisture resistance	7
CE mark	2,5
m² per pallet	90,7
Weight per m²	9 kg
Weight per pallet	22,7 kg

Performance Data

Fire Resistance (EN 13501)	Cfl-s1
EN 12664	0,12 W/(m²K)
EN 12667	0,075 (m² x K)/W
EN 717-1	E1 ≤0.1 ppm (typical value ≤ 0.05 ppm)
EN 1534	8 HB (average value)
EN 14354	EC3
EN 14354	<10% (5% typical)
EN 14354	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix (FSC-C140725)
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE mark	
Warranty	Limited Lifetime Warranty
EN ISO 10874	Class heavy Residential (Class 23)
EN ISO 10874	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR code linking to bjelin.com