


Woodura Planks 3.0

GRYBY 3.0 L



Gryby Select Earth Grey 33 FSC

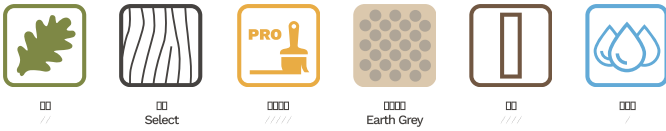

Technical Data

Species	Oak
Grade	Select
Color	Earth Grey
Finish	Välinge 5G™Dry™
Core	HDF
Length	L
Width	180 mm
Thickness	2000 mm
Spacing	9 mm
Profile	0,6 mm
Moisture resistance	7
Weight per m²	2,5 kg
m² per pallet	90,7 m²
Weight per m²	9 kg
Weight per pallet	22,7 kg

Performance Data

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,12 W/(m*K)
Thermal resistance (EN 12667)	0,075 (m2 x K)/W
Formaldehyde emission (EN 717-1)	E1 <=0.1 ppm (typical value <= 0.05 ppm)
Impact resistance (EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR bjelin.com