


Woodura Planks 3.0

STENINGE 3.0 S



Steninge is a beautiful matt-lacquered hardened wood floor that provides a clean impression. The Misty White shade is a popular choice, and the Blend grading, which includes some colour variations, adds character. Made from FSC-certified European oak, this class 33 product is extremely durable and ideal for heavy-traffic spaces like hotels, shops, offices and cafés – or the entrance of your home. The matt lacquered finish makes the floor easy to maintain while protecting it from stains.

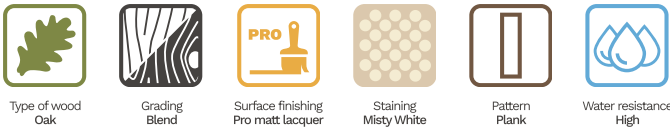

Specification

GENERAL

Type of floor	Hardened wood
Type of wood	Oak
Grading	Blend
Surface finishing	Pro matt lacquer
Staining	Misty White
Light/dark	Light
Pattern	Plank
Locking system	Välinge 5G® Dry™
Core	HDF

DIMENSIONS

Format	S
Width	151 mm
Width (ISO 24337)	5.94"
Length	1170 mm
Length (ISO 24337)	46.06"
Thickness	9 mm
Thickness (ASTM F387)	0.35"
Thickness of wear layer	0,6 mm
Thickness of wear layer (ASTM F410)	0.024"
Weight per m ²	19.9 lbs

PACKAGE

Quantity in box	9
m ² / box	1,6 m²
sq.ft per box	17.1 sqft
m ² per pallet	55,65 m²
sq.ft per pallet	598.5 sqft
Weight per m ²	9 kg
Weight per box	14,3 kg
Weight per box	31.6 lbs

CLASSIFICATION AND SAFETY

Supports Underfloor Heating	Yes
Water resistance	High
Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,12 W/(m*K)
Thermal resistance (EN 12667)	0,075 (m2 x K)/W
Formaldehyde emission (EN 717-1)	E1 <=0.1 ppm (typical value <= 0.05 ppm)
Brinell hardness (EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	Evaluated by SundaHus
Svanen	Yes (3029 0021)
A+	Yes
M1	Yes
CE Marked	Yes
Limited warranty (public environment)	10 years
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin Sweden AB | bjelin.com | support@bjelin.se | +46-771-101099

Copyright 2024 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



For installation and caring instructions, and further product information, scan the QR code or visit bjelin.com.