


## Woodura Planks 3.0

### YXENHULT 3.0 S



Yxenhult Blended (00) 33 FSC

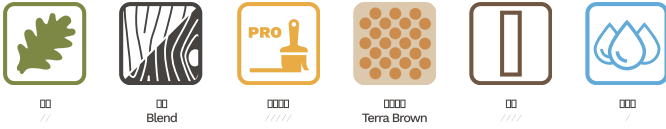

#### 00

0000	000000
0000	000000
00	00
00	Blend
0000	000000
0000	Terra Brown
00/00	0000
00	0000
0000	Välinge 5G™Dry™
00	HDF
00	
00	S
0	151 mm
0	1170 mm
0	9 mm
000000	0,6 mm
00	
0000	9
000/0	1,6 000
m <sup>2</sup> per pallet	55,65 000
Weight per m <sup>2</sup>	9 kg
0000	14,3 kg

#### 00000000

0000	0
000	0
Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,12 W/(m*K)
Thermal resistance (EN 12667)	0,075 (m2 x K)/W
Formaldehyde emission (EN 717-1)	E1 <=0.1 ppm (typical value <= 0.05 ppm)
0000 (EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	0SundaHus00
Svanen	0(3029 0021)
A+	Yes
M1	Yes
CE00	0
Limited warranty (public environment)	10 0
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin 00 bjelin.com chinainfo@valinge.se +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR 000000bjelin.com