


Woodura Planks 3.0

VENESTAD 3.0 L



Venestad is a wood-look laminate flooring product, class 33, FSC certified, with a water-resistant surface and a soft-touch finish.

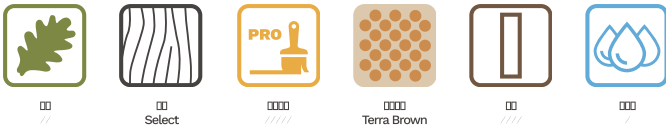

Technical Data

Product Name	Venestad
Series	Select
Color	Terra Brown
Surface Treatment	Välinge 5G™Dry™
Core	HDF
Length	L
Width	180 mm
Length	2000 mm
Thickness	9 mm
Bevel	0,6 mm
Warranty	7
Box Content	2,5 m ²
m ² per pallet	90,7 m ²
Weight per m ²	9 kg
Weight per pallet	22,7 kg

Performance Data

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,12 W/(m*K)
Thermal resistance (EN 12667)	0,075 (m ² x K)/W
Formaldehyde emission (EN 717-1)	E1 <= 0.1 ppm (typical value <= 0.05 ppm)
Impact resistance (EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	SundaHus
Svanen	(3029 0021)
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR code linking to bjelin.com