


Woodura Planks 3.0

DALSHULT 3.0 XL



Dalshult is a 33 mm FSC certified wood-look plank with a Contrast Granite finish, Vålinge 5G™Dry™ HDF core, and a thickness swelling of 11 mm.

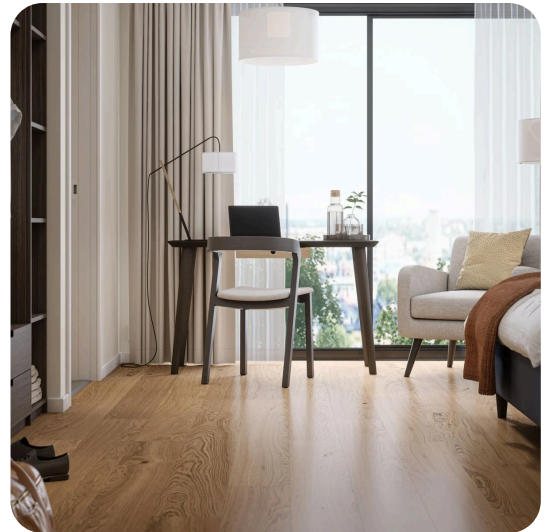

Technical Data

Product Name	Dalshult
Finish	Nature
Core	Contrast Granite
Core Technology	Vålinge 5G™Dry™
Core Type	HDF
Thickness	11 mm
Length	2200 mm
Width	206 mm
Thickness Swelling	0,6 mm
Weight per m²	11 kg
Weight per pallet	1,81 t
m² per pallet	87 m²
Weight per m²	11 kg
Weight per m²	20 kg

Performance Data

Fire Resistance (EN 13501)	Cfl-S1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0,07 m²K/W
Formaldehyde emission (EN 717-1)	E1 <= 0.1 ppm (typical value <= 0.05 ppm)
Impact resistance (EN 1534)	10 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10 years
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Vålinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Vålinge Innovation AB is under license.



QR code linking to bjelin.com