


Woodura Planks 3.0

LARVIK 3.0 XL



Larvik Select FSC

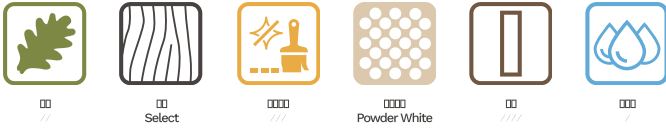

Technical Data

Microbevel	4 sided
Thickness	11 mm
Length	2200 mm
Width	206 mm
Weight per m ²	11
m ² per pallet	87
Weight per pallet	957
Wear resistance	> 1000 cycles
Impact resistance	EC3
Formaldehyde emission	E1<=0.124 mg/m3
Thermal conductivity	0,16 W/(m*K)
Thermal resistance	0.07 m ² K/W
Fire Resistance	Cfl-s1
Thickness swelling	<10% (5% typical)
Wear resistance	> 1000 cycles
FSC	FSC Mix
SundaHus	SundaHus
Svanen	3029 0021
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class Moderate residential (Class 22)

Technical Data

Microbevel	4 sided
Thickness	11 mm
Length	2200 mm
Width	206 mm
Weight per m ²	11
m ² per pallet	87
Weight per pallet	957
Wear resistance	> 1000 cycles
Impact resistance	EC3
Formaldehyde emission	E1<=0.124 mg/m3
Thermal conductivity	0,16 W/(m*K)
Thermal resistance	0.07 m ² K/W
Fire Resistance	Cfl-s1
Thickness swelling	<10% (5% typical)
Wear resistance	> 1000 cycles
FSC	FSC Mix
SundaHus	SundaHus
Svanen	3029 0021
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class Moderate residential (Class 22)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR code linking to bjelin.com