


## Woodura Planks 3.0

### HAGSTAD 3.0 XL



Hagstad Select (Select) FSC SundaHus Greenguard Gold M1 CE Limited warranty (public environment) Limited warranty (home environment) Level of use domestic (EN ISO 10874) Class Moderate residential (Class 22)

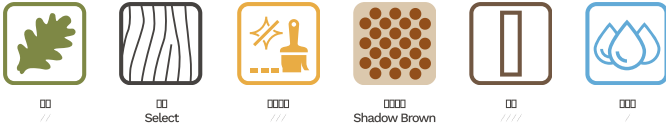

#### Technical Data

Microbevel	4 sided
Grain	Select
Grain	Shadow Brown
Grain	Medium Dark
Grain	Välinge 5G™Dry™
Grain	HDF
Grain	XL
Thickness	206 mm
Length	2200 mm
Width	11 mm
Profile	0,6 mm
Grain	4
Grain	1,81
m <sup>2</sup> per pallet	87
Weight per m <sup>2</sup>	11 kg
Grain	20 kg

#### Performance

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0.07 m <sup>2</sup> K/W
Formaldehyde emission (EN 717-1)	E1<=0.124 mg/m3
(EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 1000 cycles
FSC	FSC Mix
SundaHus	SundaHus
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class Moderate residential (Class 22)



woodura®

Bjelin | [bjelin.com](http://bjelin.com) | [chinainfo@valinge.se](mailto:chinainfo@valinge.se) | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR [bjelin.com](http://bjelin.com)