


Woodura Planks 3.0

TULLSTORP 3.0 L



Tullstorp FSC

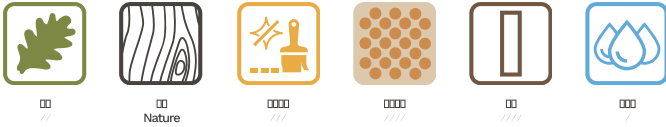

Technical Data

Material	Wood
Finish	Nature
Surface treatment	5G Dry@
Core	HDF
Length	L
Width	180 mm
Thickness	2000 mm
Profile	9 mm
Spacers	0,6 mm
Weight	7
Area	2,5 m ²
m ² per pallet	90,7 m ²
Weight per m ²	9 kg
Weight per pallet	22,7 kg

Performance

Fire Resistance (EN 13501)	Cfl-S1
EN 12664	0,12 W/(m ² *K)
EN 12667	0,075 (m ² x K)/W
EN 717-1	E1 ≤0.1 ppm (typical value ≤ 0.05 ppm)
EN 1534	8 HB (average value)
EN 14354	EC3
EN 14354	<10% (5% typical)
EN 14354	> 1000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix (FSC-C140725)
A+	Yes
M1	Yes
CE	
Warranty	10 years
Warranty	Limited Lifetime Warranty
EN ISO 10874	Class Moderate residential (Class 22)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR code linking to bjelin.com