

Woodura Planks 3.0

BONNARP 3.0 L



Type of wood
Oak



Grading
Nature




Surface finishing
Brushed lacquer



Water resistance
High

A room where you want to add sophisticated and subtle shades. The Earth Grey colour creates the ideal backdrop for a stylishly calm and harmonious space.

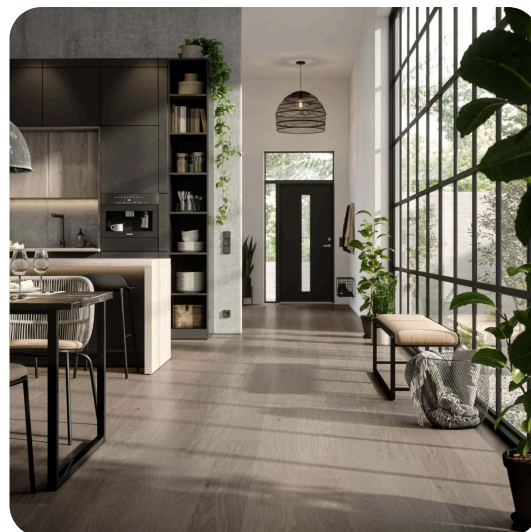

Specification

GENERAL

Type of floor	Hardened wood
Type of wood	Oak
Grading	Nature
Surface finishing	Brushed lacquer
Staining	Earth Grey
Light/dark	Light
Pattern	Plank
Locking system	5G Dry@
Core	HDF

DIMENSIONS

Format	L
Width	180 mm
Width (ISO 24337)	7.087"
Length	2030 mm
Length (ISO 24337)	79.921"
Thickness	9,2 mm
Thickness (ASTM F387)	0.362"
Thickness of wear layer	0,6 mm
Thickness of wear layer (ASTM F410)	0.024"
Weight per m ²	19.709 lbs

PACKAGE

Quantity in box	7
m ² / box	2,562 m ²
sq.ft per box	27.577 sqft
m ² per pallet	92,232 m ²
sq.ft per pallet	992.777 sqft
Weight per m ²	8,940 kg
Weight per box	23,06 kg
Weight per box	50.839 lbs

CLASSIFICATION AND SAFETY

Supports Underfloor Heating	Yes
Water resistance	High
Fire Resistance (EN 13501)	Cfl-S1
Thermal conductivity (EN 12664)	0,12 W/(m*K)
Thermal resistance (EN 12667)	0,075 (m2 x K)/W
Formaldehyde emission (EN 717-1)	E1 <=0.1 ppm (typical value <= 0.05 ppm)
Brinell hardness (EN 1534)	8 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 1000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix (FSC-C140725)
A+	Yes
M1	Yes
CE Marked	Yes
Limited warranty (public environment)	10 years
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class Moderate residential (Class 22)

MISC.

Revision nr	1
-------------	---



woodura®

Bjelin Sweden AB | bjelin.com | support@bjelin.com | +46-771-101099

Copyright 2026 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Vålinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Vålinge Innovation AB is under license.



For installation and caring instructions, and further product information, scan the QR code or visit bjelin.com.