


## Woodura Planks 3.0

### VALLBY 3.0 XL



Vallby Nature (EN) 333

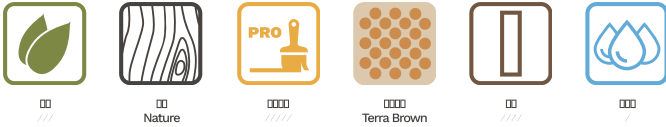

### PRO

PRO	
PRO	PRO
PRO	PRO
PRO	Nature
PRO	PRO
PRO	Terra Brown
PRO/PRO	PRO
PRO	PRO
PRO	Välinge 5G™Dry™
PRO	HDF
PRO	XL
PRO	206 mm
PRO	2200 mm
PRO	11 mm
PRO/PRO	0,6 mm
PRO	4
PRO/PRO	1,81
m <sup>2</sup> per pallet	87
Weight per m <sup>2</sup>	11 kg
PRO	20 kg

PRO	
PRO	PRO
PRO	PRO
Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0,07 m²K/W
Formaldehyde emission (EN 717-1)	E1 <=0.1 ppm (typical value <= 0.05 ppm)
PRO (EN 1534)	10 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN/TS 15676)	40
FSC	FSC Mix
Greenguard Gold	Greenguard Gold Certified
CE	PRO
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR | bjelin.com