


## Woodura Planks 3.0

### TOLLARP 3.0 XL



Tollarp is a beautiful, matt-lacquered hardened wood floor. The rich Shadow Brown shade has been paired with the Nature grading, providing a natural colour variation. Made from FSC-certified European oak, this class 33 product is extremely durable and ideal for busy spaces like hotels, shops, offices and cafés – or a heavily trafficked area of your home. The matt lacquered finish makes the floor easy to maintain while protecting it from stains.

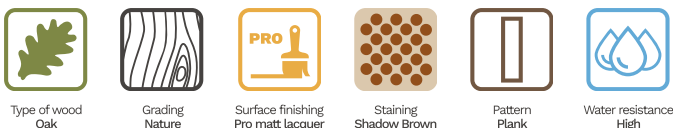

### Specification

#### GENERAL

|                   |                  |
|-------------------|------------------|
| Type of floor     | Hardened wood    |
| Type of wood      | Oak              |
| Grading           | Nature           |
| Surface finishing | Pro matt lacquer |
| Staining          | Shadow Brown     |
| Light/dark        | Dark             |
| Pattern           | Plank            |
| Locking system    | Välinge 5G® Dry™ |
| Core              | HDF              |

#### DIMENSIONS

|                         |         |
|-------------------------|---------|
| Format                  | XL      |
| Width                   | 206 mm  |
| Length                  | 2200 mm |
| Thickness               | 11,3 mm |
| Thickness of wear layer | 0,6 mm  |

#### PACKAGE

|                           |                     |
|---------------------------|---------------------|
| Quantity in box           | 4                   |
| m <sup>2</sup> / box      | 1,81 m <sup>2</sup> |
| m <sup>2</sup> per pallet | 87 m <sup>2</sup>   |
| Weight per m <sup>2</sup> | 11 kg               |
| Weight per box            | 20 kg               |

#### CLASSIFICATION AND SAFETY

|  |  |
|--|--|
| Supports Underfloor Heating            | Yes                                      |
| Water resistance                       | High                                     |
| Fire Resistance (EN 13501)             | Bfl-S1 (hardly flammable)                |
| Thermal conductivity (EN 12664)        | 0,16 W/(m*K)                             |
| Thermal resistance (EN 12667)          | 0,07 m <sup>2</sup> K/W                  |
| Formaldehyde emission (EN 717-1)       | E1 <=0.1 ppm (typical value <= 0.05 ppm) |
| Brinell hardness (EN 1534)             | 10 HB (average value)                    |
| Impact resistance (EN 14354)           | EC3                                      |
| Thickness swelling (EN 14354)          | <10% (5% typical)                        |
| Wear resistance (EN 14354)             | > 6000 cycles                            |
| Slip resistance (USRV) (CEN//TS 15676) | 40                                       |
| FSC                                    | FSC Mix                                  |
| SundaHus                               | Evaluated by SundaHus                    |
| Greenguard Gold                        | Greenguard Gold Certified                |
| CE Marked                              | Yes                                      |
| Limited warranty (public environment)  | 10 years                                 |
| Limited warranty (home environment)    | Limited Lifetime Warranty                |
| Level of use domestic (EN ISO 10874)   | Class heavy Residential (Class 23)       |
| Level of use commercial (EN ISO 10874) | Class heavy commercial (Class 33)        |



woodura®

**Bjelin** bjelin.com uk-sales@bjelin.com

Copyright 2024 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



For installation and caring instructions, and further product information, scan the QR code or visit [bjelin.com](http://bjelin.com).