


## Woodura Planks 3.0

### VISTORP 3.0 XL

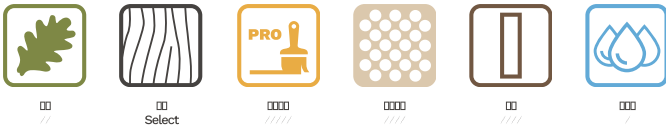

Vistorp Select (3.0) FSC

#### Technical Data

Material	HDF
Grade	Välinge 5G™Dry™
Finish	XL
Thickness	206 mm
Length	2200 mm
Width	11 mm
Profile	0,6 mm
Weight per m²	11 kg
Weight per pallet	87 kg
Weight per m²	11 kg
Weight per m²	20 kg

#### Performance Data

Fire Resistance (EN 13501)	Cfl-s1
EN 12664	0,16 W/(m²K)
EN 12667	0,07 m²K/W
EN 717-1	E1 <= 0.1 ppm (typical value <= 0.05 ppm)
EN 1534	10 HB (average value)
EN 14354	EC3
EN 14354	<10% (5% typical)
EN 14354	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix (FSC-C140725)
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Warranty	Limited Lifetime Warranty
EN ISO 10874	Class heavy Residential (Class 23)
EN ISO 10874	Class heavy commercial (Class 33)



woodura®

Bjelin | [bjelin.com](http://bjelin.com) | [chinainfo@valinge.se](mailto:chinainfo@valinge.se) | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR code linking to [bjelin.com](http://bjelin.com)