


## Woodura Planks 3.0

### VISTORP 3.0 XL



Vistorp is a powder white, matt-lacquered hardened wood floor in true Swedish fashion. The Powder White hue brightens up a room, and the Select grading adds to the clean and harmonious look. Made from FSC-certified European oak, this class 33 product is extremely durable and ideal for heavy-traffic spaces like hotels, shops, offices and cafés – or the entrance of your home. The matt lacquered finish makes the floor easy to maintain while protecting it from stains.

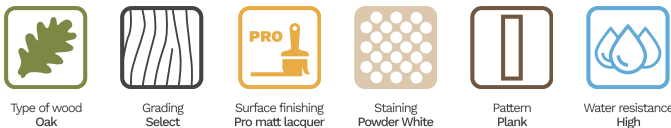

### Specification

#### GENERAL

Type of floor	Hardened wood
Type of wood	Oak
Grading	Select
Surface finishing	Pro matt lacquer
Staining	Powder White
Light/dark	Light
Pattern	Plank
Locking system	Välinge 5G® Dry™
Core	HDF

#### DIMENSIONS

Format	XL
Width	206 mm
Length	2200 mm
Thickness	11,3 mm
Thickness of wear layer	0,6 mm

#### PACKAGE

Quantity in box	4 pcs
m <sup>2</sup> / box	1,81 m <sup>2</sup>
m <sup>2</sup> per pallet	87 m <sup>2</sup>
Weight per m <sup>2</sup>	11 kg
Weight per box	20 kg

#### CLASSIFICATION AND SAFETY

Supports Underfloor Heating	Yes
Water resistance	High
Fire Resistance (EN 13501)	Bfl-S1 (hardly flammable)
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0.07 m <sup>2</sup> K/W
Formaldehyde emission (EN 717-1)	E1 <=0.1 ppm (typical value <= 0.05 ppm)
Brinell hardness (EN 1534)	10 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	Evaluated by SundaHus
Svanen	Yes (3029 0021)
Greenguard Gold	Greenguard Gold Certified
CE Marked	Yes
Limited warranty (public environment)	10 years
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

**Bjelin** bjelin.com uk-sales@bjelin.com

Copyright 2024 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



For installation and caring instructions, and further product information, scan the QR code or visit [bjelin.com](http://bjelin.com).