


Woodura Planks 3.0

NOSABY 3.0 XL



Nosaby Select (3.0) FSC

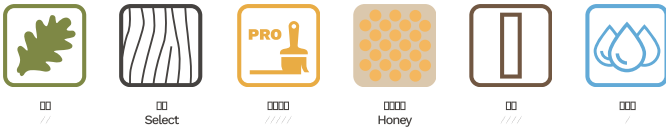

Technical Data

Material	HDF
Core	Välinge 5G™Dry™
Surface	XL
Length	206 mm
Width	2200 mm
Thickness	11 mm
Profile	0,6 mm
Weight per m ²	11 kg
Weight per pallet	87 kg
Weight per m ²	11 kg
Weight per pallet	20 kg

Performance Data

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0.07 m²K/W
Formaldehyde emission (EN 717-1)	E1 <= 0.1 ppm (typical value <= 0.05 ppm)
Impact resistance (EN 14354)	10 HB (average value) EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix SundaHus Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR bjelin.com