


Woodura Planks 3.0

VENESTAD 3.0 XL



Venestad Select (00) FSC Select (00) Terra Brown (00) Valinge 5G™Dry™ HDF

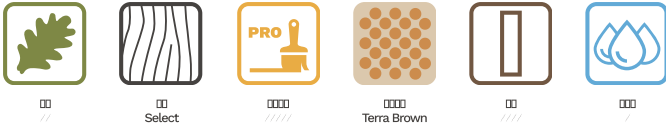

Technical Data

Material	HDF
Grade	XL
Thickness	11 mm
Width	2200 mm
Length	206 mm
Surface treatment	Välinge 5G™Dry™
Weight per m²	11 kg
m² per pallet	87 m²
Weight per pallet	1,81 kg
Number of planks per m²	4
Number of pallets per m³	1,81

Performance Data

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0,07 m²K/W
Formaldehyde emission (EN 717-1)	E1 <= 0.1 ppm (typical value <= 0.05 ppm)
Impact resistance (EN 1534)	10 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR bjelin.com