


## Woodura Planks 3.0

### GRYBY 3.0 XXL



Gryby Select 33 FSC

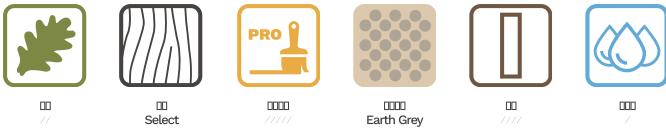

#### Technical Data

Species	Oak
Grade	Select
Finish	Earth Grey
Core	Välinge 5G™Dry™
Core Type	HDF
Thickness	XXL
Width	271 mm
Length	2378 mm
Profile	11 mm
Bevel	0,6 mm
Moisture Resistance	3
Wear Layer	1,9 mm
m <sup>2</sup> per pallet	93 m <sup>2</sup>
Weight per m <sup>2</sup>	11 kg
Weight per pallet	22 kg

#### Performance Data

Fire Resistance (EN 13501)	Cfl-s1
Thermal conductivity (EN 12664)	0,16 W/(m*K)
Thermal resistance (EN 12667)	0,07 m <sup>2</sup> K/W
Formaldehyde emission (EN 717-1)	E1 <= 0.1 ppm (typical value <= 0.05 ppm)
Impact resistance (EN 1534)	10 HB (average value)
Impact resistance (EN 14354)	EC3
Thickness swelling (EN 14354)	<10% (5% typical)
Wear resistance (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix
SundaHus	SundaHus
Svanen	(3029 0021)
Greenguard Gold	Greenguard Gold Certified
A+	Yes
M1	Yes
CE	
Limited warranty (public environment)	10
Limited warranty (home environment)	Limited Lifetime Warranty
Level of use domestic (EN ISO 10874)	Class heavy Residential (Class 23)
Level of use commercial (EN ISO 10874)	Class heavy commercial (Class 33)



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR | bjelin.com