


3.0



0000	
0000	00000
00	000
00	Select
0000	00000
0000	0000
00/00	00
00	0000
0000	Välinge 5G™Dry™
00	HDF
00	
00	XXL
0	271 mm
0	2378 mm
0	11 mm
000000	0,6 mm
00	
0000	3 0
000/0	1,9 000
m² per pallet	93 000
Weight per m²	11 kg
0000	22 kg

00000000	
0000	□
000	□
Fire Resistance (EN 13501)	Cfl-s1
0000 (EN 12664)	0,16 W/(m²K)
00 (EN 12667)	0.07 m²K/W
0000 (EN 717-1)	E1 ≤0.1 ppm (typical value ≤= 0.05 ppm)
0000 (EN 1534)	10 HB (average value)
0000 (EN 14354)	EC3
000000 (EN 14354)	<10% (5% typical)
0000 (EN 14354)	> 6000 cycles
Slip resistance (USRV) (CEN//TS 15676)	40
FSC	FSC Mix (FSC-C140725)
Greenguard Gold	Greenguard Gold Certified
CE00	□
000000000000	10 □
000000000000	Limited Lifetime Warranty
00000000 (EN ISO 10874)	Class heavy Residential (Class 23)
00000000 (EN ISO 10874)	Class heavy commercial (Class 33)

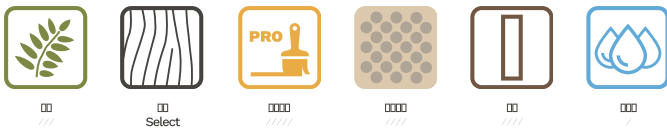

woodura®

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Vålinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Vålinge Innovation AB is under license.



QR bjelin.com