

# Herringbone Parquet

## HERRINGBONE PARQUET BORGHOLM



Type of wood  
Oak



Grading  
Select




Pattern  
Herringbone



Surface finishing  
Natural oil



Staining  
Natural

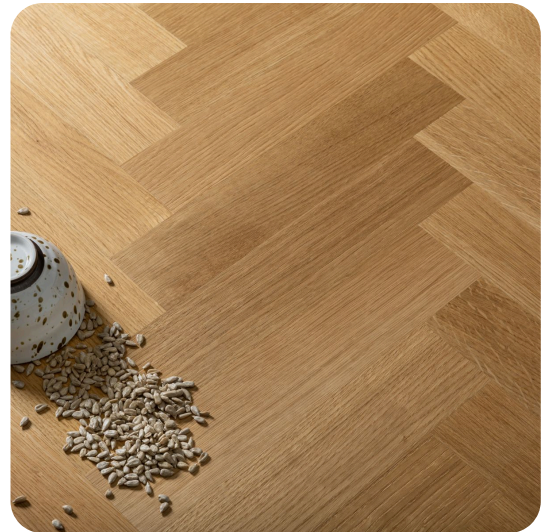

### Specification

#### GENERAL

Type of floor	3-layer parquet
Type of wood	Oak
Grading	Select
Pattern	Herringbone
Surface finishing	Natural oil
Staining	Natural
Light/dark	Medium dark
Core	HDF
Locking system	Välinge 5G®
Bevel	None

#### DIMENSIONS

Thickness of wear layer	2,6 mm
Length	345 mm
Width	69 mm
Thickness	14,6 mm

#### PACKAGE

Quantity in box	38 pcs
m <sup>2</sup> / box	0,9046 m <sup>2</sup>
Weight per box	11 kg

#### CLASSIFICATION AND SAFETY

FSC	FSC Mix (SA-COC-006371)
SundaHus	Evaluated by SundaHus
CE Marked	Yes
Limited warranty	20 years
Light Reflection Value (LRV)	29,5
Svanen	No
Supports Underfloor Heating	Yes

#### MISC.

Nobb-nummer	56631173
-------------	----------



**Bjelin Sweden AB** | [bjelin.com](http://bjelin.com) | [support@bjelin.se](mailto:support@bjelin.se) | +46-771-101099

Copyright 2024 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB ([www.valinge.se/patents](http://www.valinge.se/patents)). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



*For installation and caring instructions, and further product information, scan the QR code or visit [bjelin.com](http://bjelin.com).*