


Woodura Planks 3.0

NOSABY 3.0 XXL



Nosaby Select (Select) FSC

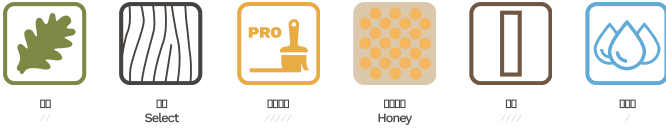

Technical Data

| | |
|---------------------------|-------------------|
| Species | Oak |
| Grade | Select |
| Grade | Honey |
| Finish | Välinge 5G™Dry™ |
| Finish | HDF |
| Thickness | XXL |
| Length | 271 mm |
| Length | 2378 mm |
| Width | 11 mm |
| Width | 0,6 mm |
| Weight | 3 kg |
| Weight | 1,9 kg |
| m ² per pallet | 93 m ² |
| Weight per m ² | 11 kg |
| Weight | 22 kg |

Performance Data

| | |
|--|---|
| Fire Resistance (EN 13501) | Cfl-s1 |
| Thermal conductivity (EN 12664) | 0,16 W/(m*K) |
| Thermal resistance (EN 12667) | 0.07 m ² K/W |
| Formaldehyde emission (EN 717-1) | E1 <= 0.1 ppm (typical value <= 0.05 ppm) |
| Impact resistance (EN 1534) | 10 HB (average value) |
| Impact resistance (EN 14354) | EC3 |
| Thickness swelling (EN 14354) | <10% (5% typical) |
| Wear resistance (EN 14354) | > 6000 cycles |
| Slip resistance (USRV) (CEN//TS 15676) | 40 |
| FSC | FSC Mix |
| SundaHus | SundaHus |
| Greenguard Gold | Greenguard Gold Certified |
| A+ | Yes |
| M1 | Yes |
| CE | |
| Limited warranty (public environment) | 10 years |
| Limited warranty (home environment) | Limited Lifetime Warranty |
| Level of use domestic (EN ISO 10874) | Class heavy Residential (Class 23) |
| Level of use commercial (EN ISO 10874) | Class heavy commercial (Class 33) |



woodura®

Bjelin | bjelin.com | chinainfo@valinge.se | +86 21 522 822 62

Copyright 2025 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB (www.valinge.se/patents). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



QR code linking to bjelin.com